

PRIME-RITE TRAP PRIMER VALVE



“... Automatically maintains a constant water seal in from 1 to 4 floor drain traps.”


Just the facts:

This all new innovative trap priming system automatically primes up to 4 floor drain traps and requires *no adjustments*. It *does* not need to be placed near a fixture and operates via line pressure drop. Connected to any cold water line, it is automatically activated when a valve or faucet is opened anywhere in the building . . . a pressure drop of 5 to 10 p.s.i. opens the valve.


Operating range: 35 to 75 P.S.I.G.

NO Adjustment Required

PART NUMBER: PR-500

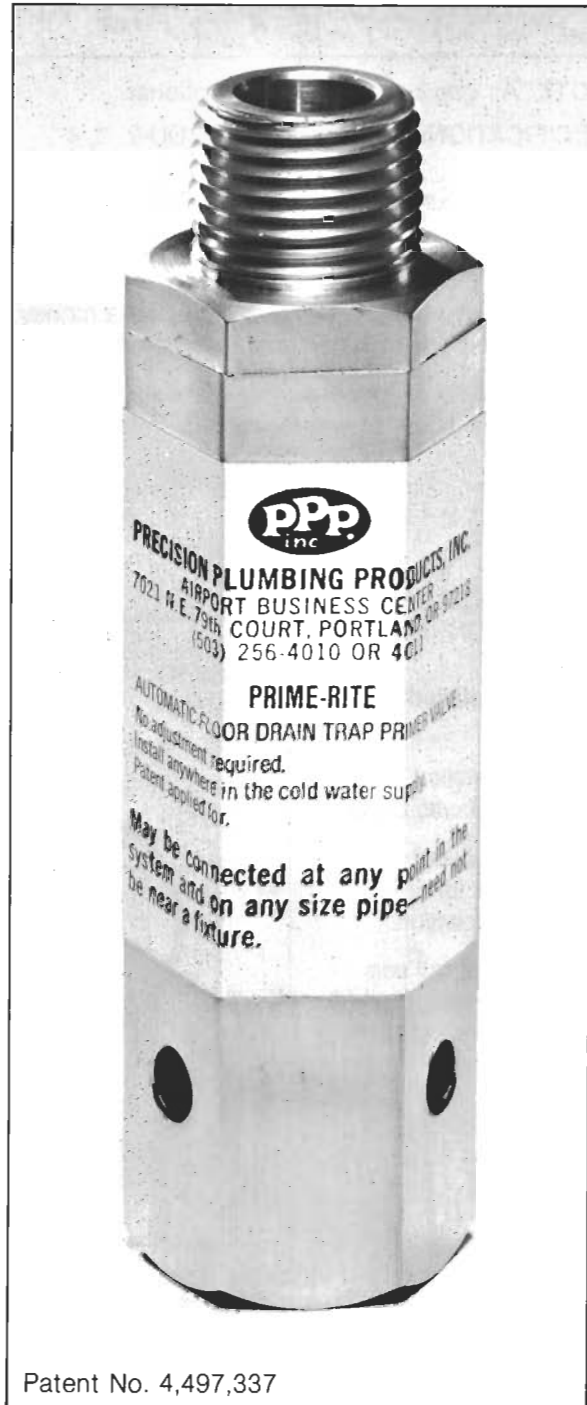

Patent No. 4,497,337

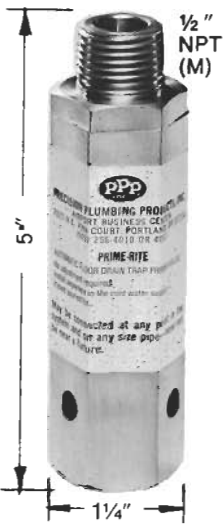

TRAP PRIMER VALVE SPECIFICATIONS

Machined of corrosion resistant brass—contains no springs or diaphragms.

“O” ring seals tested for reliability at a temperature range of -40° to 450° F.

Installed anywhere on the line—at least 12" above the traps to insure proper flow.

Inlet opening $\frac{1}{2}$ " male NPT, outlet $\frac{1}{2}$ " female NPT.

PPP inc.
PRECISION PLUMBING PRODUCTS, INC.
AIRPORT BUSINESS CENTER
7021 N.E. 79th COURT, PORTLAND, OR 97218
(503) 256-4010 OR 4011

PRIME-RITE
AUTOMATIC FLOOR DRAIN TRAP PRIMER VALVE
No adjustment required.
Install anywhere in the cold water supply
Patent applied for.

May be connected at any point in the
system and on any size pipe—need not
be near a fixture.